

www.f-trapp.de

Supply bollard TVP-4500





Applicationexample TVP-4500

Description

Modern supply bollard for universal applications.

He has a modern electrical system equipped (with plugs, fuses and earth leakage current breakers).

The electrical equipment can, according to the space available, to be adapted to your wishes.


The operation is also possible with the door closed. This bollard is available with one or with two opposite doors.

This supply bollard is alternatively also be equipped with a water connection.



Supply bollard TVP-4500

Dimensioning

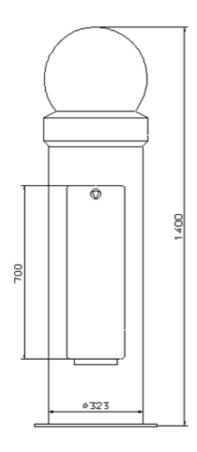

Technical specifications:

Casing:

- Steel tube ø 323 x 5,6 mm, galvanized
- Decorative items made of cast aluminum
- One or two doors with triangular locking mechanism and cable entry opening
- with flange for mounting on ground base or existing concrete base
- Paint finish in RAL color of your choice

Default installation:

- 1 x CEEform-socket 32A, 5p, 400V
- 1 x MCBs 32A, 3p, C
- 1 x CEEform-socket 16A, 5p, 400V
- 1 x MCBs 16A, 3p, C
- 3 x Earthed socket 16A, 230V
- 3 x MCB 16A, 1p, B
- 2 x earth leakage current breaker 40A, 0,03A, 4p
- 2 x Connections 5 x 10 mm²

Adapting the electrical and Water installation according to the space available according to customer requirements.



Supply bollard TVP-4500

Applicationexample

